REDLINE
WALK BEHIND ROLLER




RW 750 D

Technical Data

Masses	
Operating mass	745 kg
Basic Weight	715 kg
Compaction	
Static linear load (front/rear)	5.5 kg/cm
Nominal amplitude	0.4 mm
Centrifugal force	22 kN
Vibration frequency	60 Hz
Engine	
Manufacturer/Model	Rehlko KD441
Type	Aircooled, Diesel
Rated power	6.6 kW @ 2830 rpm
Electrical system	12 V
Tank Capacity	
Fuel tank capacity	5 l
Hydraulic tank capacity	14 l
Water tank capacity	58 l
Traction	
Speed range	0 - 4.5 km/h
Theoretical max. gradability	35 %
Dimensions	
Drum width W	650 mm
Width B	720 mm
Height H1	1350 mm
Height with the handle locked	1,725 mm
Clearance K	210 mm
Drum diameter	400 mm
Length L/L1	1986 mm /2165 mm

Benefits
Infinitely variable machine speed control
Hydrostatic parking brake system delivers peace of mind on even the steepest terrain
Optional lighting for night visibility
Double your comfort and machine control with our advanced vibration reduction
Single-point lifting for easy transportation
Innovative start and stop control simplify your workflow
The easy-to-clean sprinkling system and accessibility to the service points reduce downtime
Back-up drive protection on the steering handle
Two scraper on each drum
Keyless electric starter system
One point lift

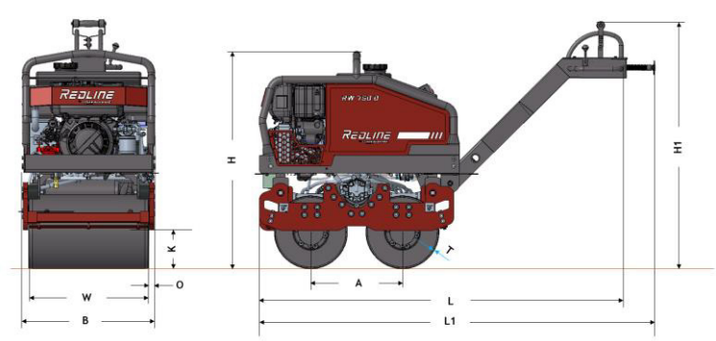

We reserve right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.

The above information is a general description only, all information are supplied without liability.